

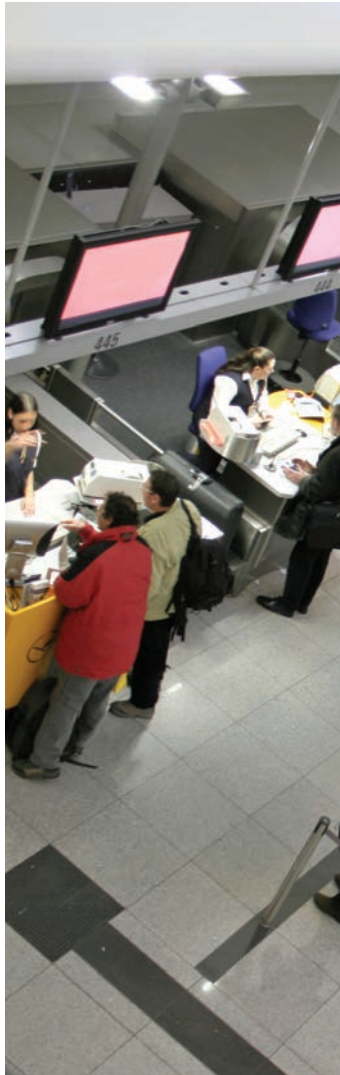


VERY EARLY WARNING ASPIRATING SMOKE DETECTION (ASD) FOR AIRPORTS

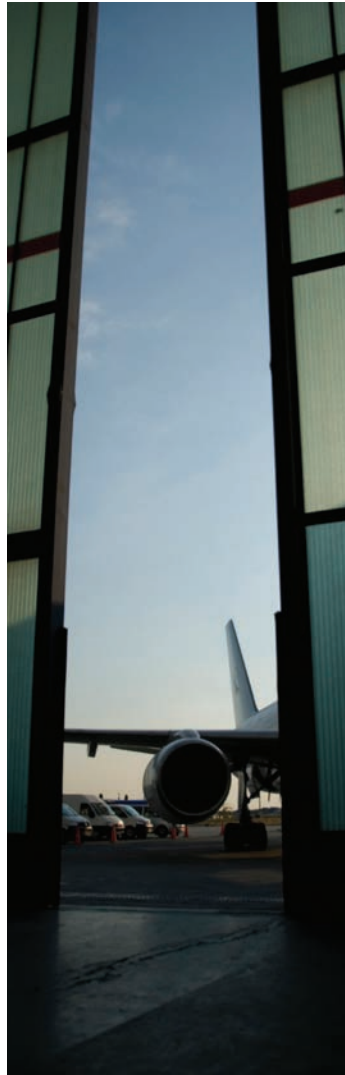

VESDA® & FFAST®

VESDA® & FFAST® aspirating smoke detection (ASD) solutions with continuous air sampling provide the earliest possible warning of an impending fire hazard. Aspirating smoke detectors buy the critical time needed to investigate an alarm and initiate an appropriate response to prevent injury, property damage, or business disruption. Our ASD systems have multi-level warnings and a wide range of sensitivities that do not degrade or change over time, so even minute levels of smoke can be detected before a fire has time to escalate. In addition, our ASD systems are manufactured using Six Sigma techniques and ISO 9000 standards and have been certified by regulatory bodies worldwide.

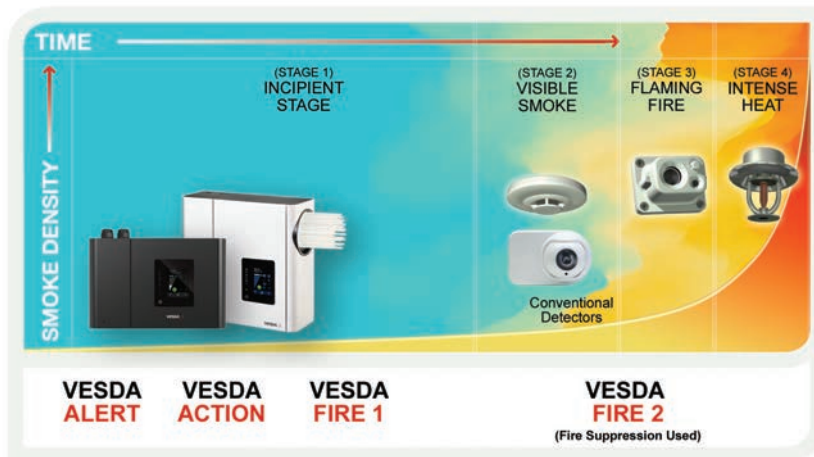

VESDA-E ASPIRATING SMOKE DETECTORS

For decades, the VESDA range of aspirating smoke detectors has been recognized as the best in the world. The new VESDA-E family has a range of features, including:

- **VESDA Smoke+**, offers up to 15 times increased sensitivity, at least three times better dust rejection, up to twice the longevity while maintaining consistent sensitivity over time and up to 8% less power consumption per unit area
- **VESDA Flex** ensures future proof expandability for maximum flexibility using, StaX hardware expansion modules that easily bolt onto the VESDA-E detector to add additional capabilities, including power supplies and blowback units
- **VESDA Point Addressability with VEA** provides situational awareness to improve response time, efficiency and effectiveness through pin-point addressability for up to 40 locations
- **VESDA Connect** provides extensive connectivity options including Ethernet, USB, VESDAnet and relays, to reduce installation, commissioning, monitoring and maintenance costs
- **VESDA TCO** reduces the Total Cost of Ownership (TCO) through Capex value, OPEX savings, plug-and-play installation, design-less pipe and microbore tube networks, vast monitoring options, and backwards compatibility. With VESDA-E you can reduce TCO by up to 15% for non-addressable products and up to 60% for the point addressable products

All these features combine to make VESDA-E the best choice for early warning of smoke and fire threats. VESDA-E's sensitivity, flexibility, reliability, programmability, and expandability provides customers with superior performance and protection, while lowering the TCO.

VESDA-E ASPIRATING SMOKE DETECTORS

VESDA-E VEP — Mainstream ASD

The VESDA-E VEP series of smoke detectors bring the latest and most advanced detection technology to provide very early warning and the best nuisance alarm rejection to a wide range of applications. Built on the Flair™ detection technology and years of application experience, VEP detectors achieve consistent performance over their lifetime via absolute calibration. Flair is the revolutionary detection chamber that forms the core of the VESDA-E VEP, providing higher stability and increased longevity. Direct imaging of the sampled particles using a CMOS imager combined with multiple photodiodes allows better detection and fewer nuisance alarms. In addition, the VEP is backward compatible with VESDA VLP, allowing existing VLP installations to easily upgrade to the latest ASD technology.



VESDA-E VES — Sector Addressable ASD

The VESDA-E VES is similar to the flagship VESDA-E VEP aspirating smoke detector but also includes a valve mechanism in the inlet manifold to allow a single zone to be divided into four separate sectors, for example, distinguishing between separate aisles within a data room. Each sector has four individually configurable alarm levels (Alert, Action, Fire 1 and Fire 2) allowing optimum protection in a wide range of applications and allowing the user to quickly locate the source of smoke. Once the detector has identified the First Alarm Sector, it continues to sample from all sectors to monitor fire growth.



VESDA-E VEA — Pinpoint ASD

VESDA-E VEA introduces a new approach for point addressable smoke detection; providing pinpoint addressability by using a network of VEA sampling points located in the protected area; connected to a centralized detector which actively draws air via microbore tubes. VEA provides assured detection by having end to end system integrity monitoring of the sampling network. VEA also provides flexible and fast installation utilizing easy to install flexible microbore tubes with push-fit connectors. The VEA detector supports 40 sampling points, all managed from the centralized detector which can be located in a readily accessible location. Centralized Test and Maintenance can reduce service time by up to 90% allowing servicing of up to 500 addresses a day lowering TCO by up to 60%. VEA centralized test and maintenance is ideally suited where interruption free business operation and restricted access are of paramount importance. With best in class connectivity via WAN and Wireless networks, the VSC/VSM4 applications provide real time and remote access for efficient and effective response.



VESDA-E VEU — Highest Sensitivity ASD

The VEU series of aspirating smoke detectors are the premium detector of the VESDA-E range. An ultra-wide sensitivity range; 15 times greater than VESDA VLP, and provision for more sampling holes provide an increased coverage in high airflow applications by at least 40%. Considerably longer linear pipe runs and extended branched pipe network configurations cater perfectly to applications with higher ceilings providing an increased coverage by up to 80% whilst allowing convenient detector mounting for ease of service and maintenance. A range of revolutionary new features provide unsurpassed detection performance, flexibility, field programmability, connectivity and reduced TCO.



VESDA LASER ASPIRATING SMOKE DETECTORS



VESDA VLF

VESDA VLF is ideal for small, business-critical spaces. Available in two models, the VLF-250 covers up to 250 m² (2,690 sq. ft.), and the VLF-500 covers areas up to 500 m² (5,380 sq. ft.).

VESDA VLI


VESDA VLI is an industry-first early warning ASD system, designed to protect industrial applications and harsh environments of up to 2000 m² (21,520 sq. ft.). The VLI detector combines a fail-safe Intelligent Filter (patent pending) with an advanced clean-air barrier for optics protection allowing the use of absolute detection and a long detection chamber life without the need for re-calibration.



VESDA SOFTWARE


VSM4 — VESDA Smoke System Management Center

VSM4 configures, monitors and trouble-shoots Xtralis aspirating smoke detection systems. It is easy to use and has been designed to provide the operator with complete control. The user-friendly interface allows you to assess and respond quickly to system events – all from one convenient location. VSM4 is a total solution for integrated control and monitoring of your Xtralis very early warning smoke detection systems.

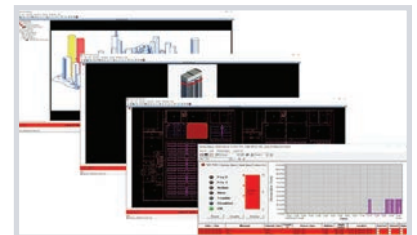


ASPIRE — VESDA System Design and Optimization

The performance of an ASD system is dependent on the design of the pipe network used to transport air back to the smoke detector. VESDA ASPIRE is a Windows-based application that aids the specification and design of pipe networks for VESDA air sampling smoke detectors. It provides the designer with tools to speed the design process and ensure optimum network performance and installation quality. ASPIRE also makes implementation of the design easy. With automatic generation of lists of all the components required for the project and an Installation Data Pack, the installer will have all the information they need at their fingertips.

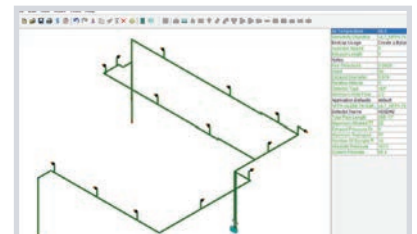

VSC — VESDA System Configuration and Commissioning

VSC configures, commissions and maintains the full range of VESDA by Xtralis fire detection products including smoke detectors, LCD programmers and high-level interfaces. VSC can configure a single VESDA smoke detector or an entire network and is equipped with additional features that allow faster setup, fault resolution and event diagnostics.

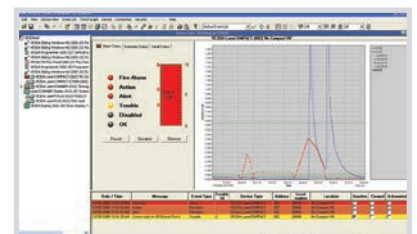



VESDA-E & VESDA FEATURES

Feature	VESDA-E					VESDA LASER	
	VEU	VEP		VES	VEA	VLF 250/500	VLI
		VEP 1-pipe	VEP 4-pipe				
Pipes and Area Coverage							
Pipe Length (Linear)	400 m (1,312 ft)	100 m (328 ft)	280 m (919 ft)	280 m (919 ft)	40 x 100 m (40 x 328 ft)	25 / 50 m (82 / 164 ft)	360 m (1,181 ft)
Pipe Length (Branched)	800 m (2,624 ft)	130 m (427 ft)	560 m (1,837 ft)	560 m (1,837 ft)	N/A	30 / 60 m (98 / 197 ft)	445 m (1,460 ft)
Area Coverage	6,500 m ² * (69,965 sq. ft)	1,000 m ² (10,760 sq. ft)	2,000 m ² (21,520 sq. ft)	2,000 m ² (21,520 sq. ft)	3,345 m ² (36,005 sq. ft)* across 40 sample holes	250 / 500 m ² (2,690 / 5,380 sq. ft)	2,000 m ² (21,520 sq. ft)
No. of Pipe Inlets	4	1	4	4	40	1	4
Multiple Pipe Addressability	No	No		Up to 4	Up to 40	No	No
Sensitivity							
Min Fire 1 Threshold	0.001% obs/m (0.0003% obs/ft)	0.01% obs/m (0.0030% obs/ft)		0.01% obs/m (0.0030% obs/ft)	1.6% obs/m (0.5% obs/ft)	0.025% obs/m (0.008% obs/ft)	0.15%/m (0.046%/ft)
Detection Range	0.001 - 20% obs/m (0.0003 - 6.575% obs/ft)	0.005 - 20% obs/m (0.0015 - 6.575% obs/ft)		0.005 - 20% obs/m (0.0015 - 6.575% obs/ft)	0.020 - 16% obs/m (0.006 - 5.17% obs/ft)	0.025 - 20% obs/m (0.008 - 6.575% obs/ft)	0.05 - 20% obs/m (0.015 - 6.575% obs/ft)
EN54-20 (Class A/B/C)							
Max. no of Holes (Class A / B / C)	80 / 80 / 100	30 / 40 / 45	40 / 80 / 100	40 / 80 / 100***	40 - 40**	VLF 250 12 / 12 / 12; VLF 500 30 / 30 / 30	24 / 28 / 60
Sampling Point Sensitivity (%obs/m)	1.5 / 3 / 8	1.5 / 3 / 8		1.5 / 3 / 8***	1.6 / 4 / 8	1.5 / 4.5 / 10	1.5 / 4.5 / 10
Transport Time (seconds)	70 / 90 / 110	60 / 90 / 110		60 / 90 / 90***	40 - 90 (Tube length dependent)	VLF 250 60 / 60 / 60 VLF 500 90 / 90 / 90	60 / 90 / 120
Additional							
Hazardous Area Approval (FM Class 1, Div 2, Groups A, B, C, D)	No	Pending	Pending	No	N/A	Yes	Yes
IP Rating	IP40	IP40		IP40	IP40	IP30	IP66
Two Stage Filtration	Yes	Yes		Yes	Yes	Yes	Patented Intelligent Filter Secondary Foam Filter Sub-sampling Probe
Worldwide Certificates	CSFM, VdS, CE, UKCA, ActivFire, FM, NF, CCC, EN 54-20, ISO 7240-20	CSFM, FM, ActivFire, CE, UKCA, VdS, NF, CCC, EN 54-20, ISO 7240-20		CSFM, ActivFire, VdS, EN 54-20, ISO 7240-20, FM, CE, UKCA, CCC	CSFM, FM, ActivFire, CE, UKCA, NF, VdS, EN 54-20, ISO 7240-20	CCC, FM, ActivFire, CE, UKCA, LPCB, VdS, NF, EN 54-20	FM, ActivFire, CE, UKCA, LPCB, NF, SIL 2 as per IEC 61508, EN 54-20

* System design and regulatory requirements may restrict the monitoring area to a lesser amount

** Check local codes for the required transport times determined by the tube lengths

*** Subject to agency Testing

OPEN AREA BEAM DETECTORS

OSID — Open Area Smoke Imaging Detectors

The OSID range of detectors provides reliable, cost-effective smoke detection for open spaces where fire detection presents unique challenges and where very early warning is not always the priority. Using CMOS imaging technology, the OSID range uniquely delivers faster installation and superior detection performance that cannot be achieved by traditional reflective beam detectors. The CMOS imager has a field of view that allows rapid set up reducing installation time from hours to minutes. The CMOS imager finds and locks on to their detection target (Emitter or Reflector); is then set to ignore unwanted light reflections and can accommodate building movement issues. The CMOS imager allows to minimize drastically false alarms from foreign object intrusion and sunlight saturation.

In its simplest configuration, OSID-R (reflective) uses an imager and a reflector. It operates on the principle of light obscuration utilizing an Infra-Red beam and smart analysis at a pixel level of its reflector, offering superior performance. Power and connectivity occur in the imager only and the OSID-R only requires a single standard reflector on the opposite wall irrespective of detection distance.

OSID-DE (dual-ended) uses a wired or battery-powered emitter(s) roughly aligned on the opposite wall within the protected area. The emitter sends both infrared and ultraviolet coded light signals to the imager. The innovative use of dual light frequencies in an open-path device enables OSID-DE to discriminate between real smoke and solid objects; allowing a high resistance to sudden and transient dust and steam clouds, thus drastically reducing false alarms. In a multi-emitter configuration, OSID-DE can have up to 7 emitters for a single imager offering a true 3D detection solution.



FAAST LT-200

The FAAST LT-200 ASD is designed with the installer and end user in mind. It serves the wide variety of Class C applications where maintenance is difficult, where traditional smoke detection methods are inappropriate or prone to fail due to harsh environments or areas where aesthetics matter. It is also suitable for smaller mission-critical applications where very early warning - Class A or B detection is required. FAAST LT-200 combines proven aspirating detection technologies to deliver reliable smoke detection and efficient installation and maintenance. The device comprises innovative and intelligent internal design features designed to protect vulnerable components. These include a high sensitivity LED detection chamber (featuring a high-power output IR LED and high gain IR receiver amplifier), along with ultrasonic flow sensors. The device is fast to install and easy to commission thanks to Pipe-IQ pipe design and configuration software, which is included as standard. FAAST LT-200 stand-alone devices are available as single channel and dual channel devices, offering flexibility for different detection strategies. A range of customizable settings are geared towards maximizing device performance and meeting different application needs. The device also includes pre-alarm functionality for graduated alarm thresholds. The FAAST LT-200 provides alarm and fault relays with auxiliary events relay as an option. These can be set as latched or non-latched. To accommodate local installation standards or environments, flow and general fault delays can also be set.



FAAST LT-200 Features

FEATURES	SPECIFICATION
Max. Single Pipe Length	100 m
Max. Total Branched Pipe Length	160 m (per channel)
Maximum Air Inlet Holes	18 (per channel)
Outside Pipe Diameter	25 mm or 27 mm
Internal Pipe Diameter	15 - 21 mm
Sensitivity Range	0.07 - 0.66% obs/m (Alarm level 1-5)
Relays	3 (1 Alarm, 1 Fault, 1 Pre-Alarm) x per channel
Sounder Outputs	1 per channel
Sound Performance	As low as 26db(A)
Event Log	2,244 events
Interfaces	Terminal blocks: power supply, relays, sounder outputs, external input; Loop Connection, USB port; Buttons (Test, Reset, Disable)
Power Supply & Relays Connections	Max. 2 mm ²
USB	Standard USB cable for Type B USB connection
Shipping Weight - Inc. Packaging Material	6.5 kg (dual channel)
Flow Monitoring & Reporting	High and low according to EN54-20
Filtration	Replacement filter
Smoke Sensors	High sensitivity LED Detection Chamber
External Supply Voltage	18.5 - 31.5 V
Remote Reset Time	2s
Power Reset	0.5s
Operating Current	
1 Channel Device	170 mA @ 24 VDC (excluding sounders)
2 Channel Device	270 mA @ 24 VDC (excluding sounders)
Max. Alarm Current	
1 Channel Device	360 mA @24 VDC (excluding sounders)
2 Channel Device	570 mA @24 VDC (excluding sounders)
Relay Contact Ratings	2.0 A @ 30 VDC, 0.5A @ 30 VAC
Environmental Specifications	
Operating Temperature	-10°C to 55°C
Humidity Range	10% to 93% (non-condensing)
IP Range	65
Coverage Area	Up to 2,000 m ² according to national design regulations

PIPEIQ

Pipe-IQ, the all-in-one pipe design, configuration and monitoring software - guides users through system design and provides full device configuration and ongoing system monitoring. Pipe-IQ™ is included free of charge with FAAST devices.

ABOUT XTRALIS



Xtralis is a leading global provider of powerful solutions for very early & reliable detection of smoke, fire, and gas threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised.

We protect highly valuable and irreplaceable assets and infrastructure belonging to the world's top governments and businesses.

To learn more, please visit us at www.xtralis.com