

# OSID-DE IMAGER RESET STATION

## RTS151KEY, RTS151 KIT



### Application

This reset station can be connected directly to the OSID-DE Dual Ended Imagers imager's reset input and remote alarm led output. To operate with the Imagers, the unit requires an external 24 VDC power supply, the same supply that is used to power the Imagers.

Two versions are available: a flush mount unit (part No. RTS151KEY), and a unit complete with backbox to be used for surface mounting (part No. RTS151 KIT).




### Installation

There are 2 possibilities to wire the OSI-90 and OSI-10 Imagers to the RTS150KEY unit:

- A "3 wire" connection, provides a reset switch operation and Alarm LED signaling.
- A "4 wire" connection, offers reset switch and both Alarm LED and OK LED signaling.

For wiring details, please refer to Imagers Connection to RTS150KEY Installation Sheet (Document No. 33122).

### Wiring Diagrams

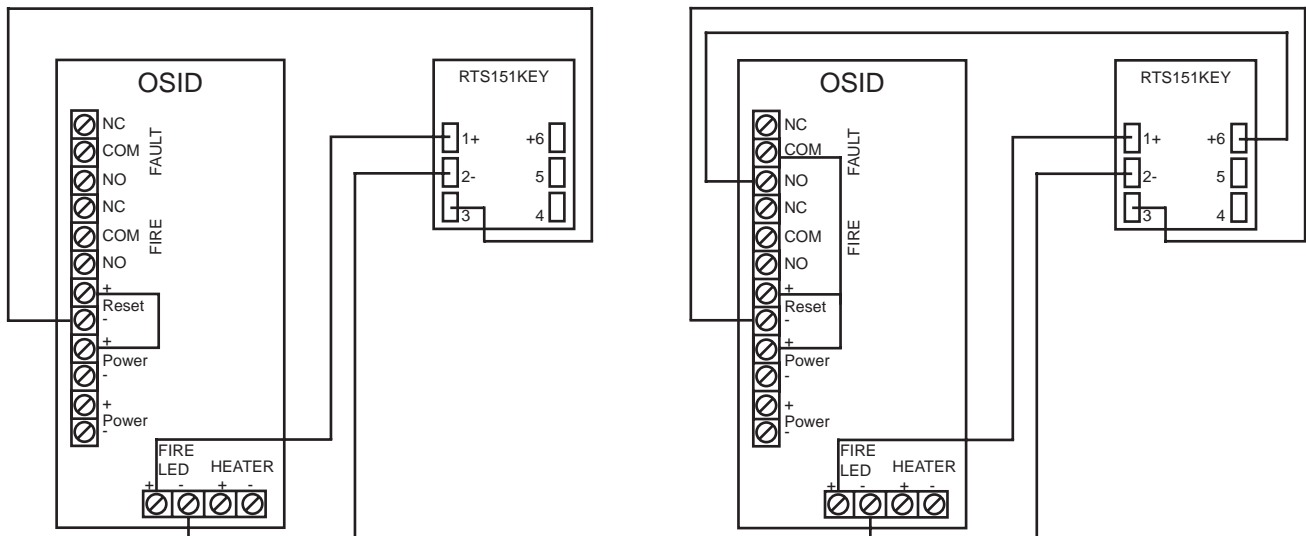

### Features

- Reset station for OSID-DE Imagers
- Red and Green LED signalling
- Flush and surface mount solution

### Listings / Approvals

- UL
- FM
- CE

# OSID-DE IMAGER RESET STATION

## TECHNICAL SPECIFICATIONS



### Specifications

Material	PVC
Color	White
Dimensions (W x H x D) RTS151KEY	70mm x 117mm x 46 mm (4.6" x 2.75" x 1.8")
RTS151KEY Backbox	76mm x 121mm x 44mm (3" x 4 3/4" x 1 3/4")
Humidity	95% relative humidity, non-condensing Max
Temperature	-10°C to 60°C (14°F to 140°F)

### Ordering Information

Ordering Code	Description
RTS151KEY	Imager Reset Station Flush Mount
RTS151 KIT	Imager Reset Station Surface Mount