

WIND POWER GENERATION



VESDA ENSURES SERVICE CONTINUITY OF ANY WIND POWER GENERATION PLANTS

- CONTROLLERS

- TRANSFORMERS

- SUBSTATIONS

- SWITCH ROOMS

- CONTROL ROOMS

- DISC BRAKING SYSTEM

As the size and complexity of wind power generation sites grow, a reliable and more effective fire protection system is a necessity.

An effective fire protection solution for a Wind Power Generator is a challenge due to its physical structure. Its mechanical and electrical components are condensed into a small location with a very high airflow. This application is considered high risk due to the high voltage electrical systems and the elevated temperatures within the operational areas.

Conventional fire detection systems do not offer the very early warning capability necessary to detect fires in these high risk applications. Loss prevention through effective fire detection is a key factor in wind power generation facilities.

The constant generation and supply of electricity is critical to all sectors of the community. Industrial, commercial and domestic dependency on a continuous source of power cannot be compromised by the risk of fire.

CONSIDER....

The turbines and electrical operational areas can be anywhere up to 100 meters above the ground and unmanned. Accessibility is difficult, therefore, increasing the response time in the event of a fire. Time is critical considering the potential damage to expensive wind power generation equipment and the loss of service to power consumers.

Electrical fires can be in progress for days and the smoke developed during the incipient stage of a fire is difficult to detect using conventional point type detectors.

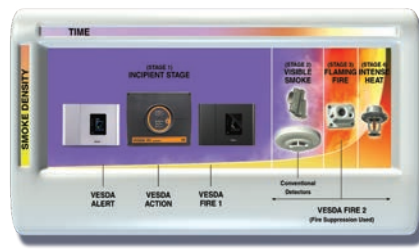


Figure 1. VESDA smoke detectors can be configured to detect a fire at the earliest stage. The multiple alarm levels can be configured to initiate an appropriate response.

The solution is to have a detector sensitive enough to detect incipient smoke, yet flexible enough to enable multiple alarm settings staged through the fire process, avoiding false alarms.

THE VESDA ADVANTAGE....

VESDA, the world's leading aspirating smoke detection system, provides the earliest possible warning of a potential fire event by detecting smoke particles at the incipient (first) stage of fire. (Refer to Figure 1).

VESDA's unique filtration system traps atmospheric particulates, such as dust, before the air sample enters the detection chamber. Combined with VESDA's "Absolute" detection capability, this feature assists in preventing false alarms by ensuring that detection sensitivities are not altered once set.

A VESDA detector should be installed into each turbine (Nacelle) to protect the electrical & mechanical components, thus providing the earliest possible warning of fire. A detector should also be installed at ground level to protect electrical switch cabinets and controls.


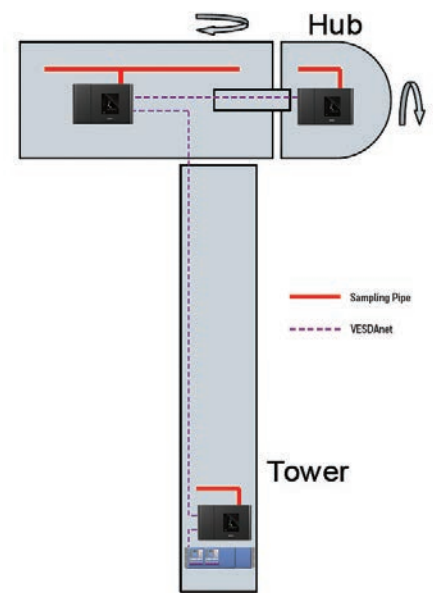


Figure 2. Sampling Pipe arrangements depend on the specific turbine design

The VESDA systems are connected to the turbines intelligent control system which enables the engine to stop immediately when the system detects smoke in its chamber.

The VESDA wide sensitivity range and multiple alarm levels ensure fire suppression systems are easily integrated with aspirating equipment. Very early warning combined with suppression provide a total fire system solution from detection to protection.

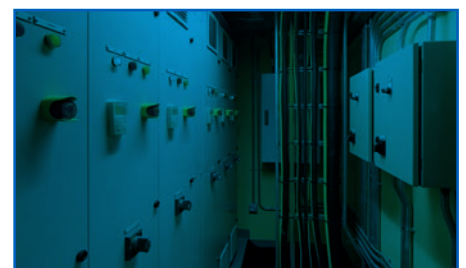

PERFORMANCE-BASED DESIGN APPROACH

The most appropriate fire detection design approach is one where the unique aspects of the application are thoroughly considered - Wind Farms are unique applications that require a performance based approach. Figure 2 is an example of sampling pipe arrangements within a turbine.

By assessing the environment and understanding the potential risks, a fire detection system can be specifically designed to ensure early detection, thereby, minimising disruption to services and loss of equipment and property.

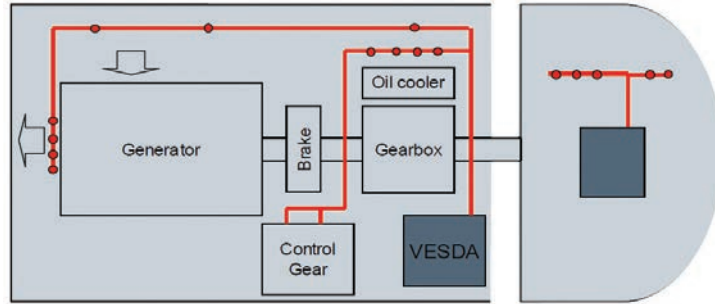


Figure 3. Sampling Pipe arrangements depend on the specific turbine design

CONTROL AND SWITCH ROOMS

Control rooms and Switch rooms often form part of Wind Farm facilities and represent a critical part of any power generating application. These large space enclosures accommodate a high concentration of electronic equipment (e.g. control panels, computer, switching equipment, etc.) much of which is located within enclosed cabinets.

Low thermal energy “in cabinet” fires coupled with the risk of smoke dilution make it extremely difficult for conventional detectors to react. VESDA, on the other hand, has no difficulty in detecting smoke in these environments.

Cabinet detection is achieved by installing capillary sampling (located either above the cabinet - Refer to Figure 4, or as ceiling mounted pipework) to sample directly from the cabinet.

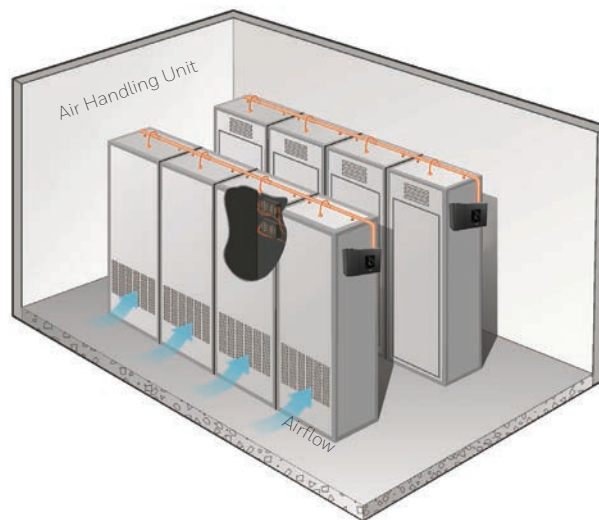


Figure 4. In-Cabinet Capillary Sampling for Switch Rooms

Sampling pipes can also be located in the ceiling void, floor void and at the return air grille of the Air Handling Unit (AHU). VESDA's system flexibility ensures that the positioning of sampling holes does not interfere with the location of equipment such as control consoles.



WHEN SELECTING AN ASPIRATING SMOKE DETECTOR, INSIST ON:

- World's widest sensitivity range
- Dynamic sensitivity range: 0.005 - 20% obs/m
- Programmable multiple alarm thresholds
- Comprehensive product range
- Worldwide-accredited global distribution and support network
- Advanced filtration technology
- Comprehensive and redundant peer to peer communication network (VESDAnet)
- Accurate event log and reporting
- Absolute fixed and traceable calibration

ABOUT XTRALIS



Xtralis is a leading global provider of powerful solutions for the very early & reliable detection of smoke, fire, and gas threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised.

We protect highly-valued and irreplaceable assets and infrastructure belonging to the world's top governments and businesses.

To learn more, please visit us at www.xtralis.com