

VESDA ACCESS HLI™

STANDARD VHX-0320

WALL-MOUNTED VHX-1320



VESDA Access High Level Interface

The VESDA Access High Level Interface (HLI) integrates VESDAnet¹ networks with host monitoring platforms such as Building Management Systems (BMSs) and Fire Alarm Control Panels (FACPs).

The Access HLI acts as a proxy for all VESDA devices on the VESDAnet network, providing access to the rich status information available from VESDA detectors as well as the ability to control and configure these devices. The Access HLI is able to report alarms to the host within a few seconds of a detector reaching an alarm condition. Exact performance is dependent on the polling strategy and size of the monitored network. The Access HLI is able to support up to 100 VESDA detectors on a single VESDAnet network.



In its simplest configuration, the Access HLI provides a simple Master/Slave interface which allows the host to monitor and control the VESDA devices on a VESDAnet network.

The Access HLI also supports a subscription mechanism allowing the host to be asynchronously notified of changes in the status of the monitored VESDA devices on a VESDAnet network. The host will be notified whenever the state of a device changes such as an alarm or fault condition being raised.

VHX-1320 Wall-Mounted Access HLI

The wall-mounted version is housed in a metal enclosure allowing for permanent mounting on a flat surface. With a built-in VESDAnet interface you don't need a remote VESDAnet socket module making the wall-mounted HLI a cost effective solution to your interface requirements.

VHX-0320 Access HLI

A standard unit used to provide a flexible solution where permanent mounting is not required. In this case a VESDAnet socket interface is required to connect the HLI onto the VESDAnet network.

Protocol Supports

- VESDA VLP, VLS, VLC, VLF and VLI range of Detectors
- VESDA-E VEP, VEP 1P & VEU (No VES) and in Mimic Mode VLP/VLC/VLS
- Alarm Status
- Fault Status
- Smoke Level
- Detailed Fault Information
- Alarm Thresholds
- Detector Control including Reset, Disable, Silence, Alarm Test and Normalise
- Operational Status for processes such as Normalisation and AutoLearn
- Asynchronous notification of the device state including alarm level, detailed faults and current thresholds

Features

- Direct access and monitoring of your entire VESDAnet network
- Seamless data transfer
- Easily configured using Xtralis configuring and monitoring software packages

Listings / Approvals



VESDA HLIs are recommended for secondary monitoring of fire alarms and other notifications from VESDAnet network. They are also suitable for primary reporting to the fire panel or other primary reporting systems. When used for primary reporting VESDA HLIs need to be integrated and approved /listed with the relevant fire panel or the primary reporting system for the relevant fire standards and codes.


¹ VESDAnet is a propriety communications protocol allowing your VESDA range of smoke detectors, displays, programmers and remote units (collectively known as devices) to communicate with each other on the one network. VESDAnet is a fault tolerant bi-directional protocol. This means that if one direction of communication fails, then your VESDAnet messages are transmitted in the opposite direction.

VESDA ACCESS HLI™


TECHNICAL SPECIFICATIONS



Dimensions


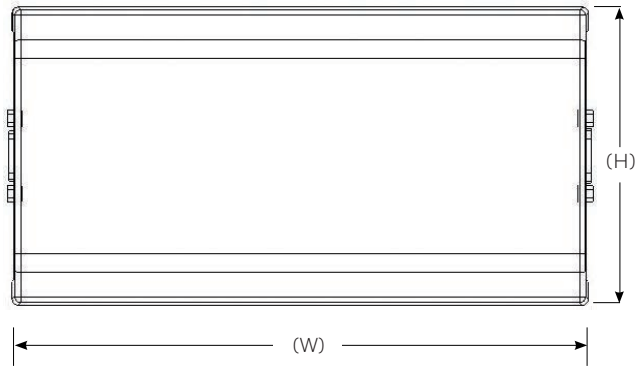


Standard

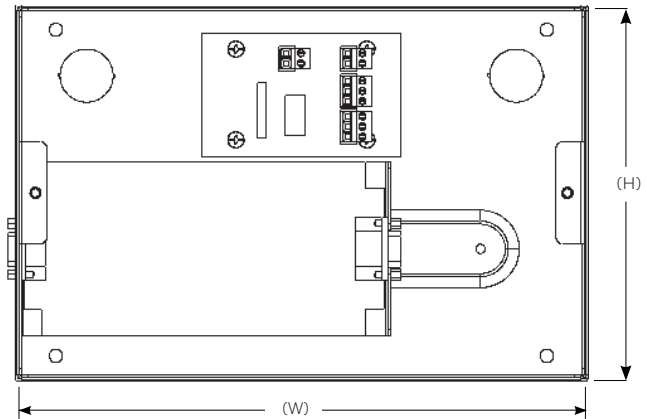

Wall Mounted

Example VESDAnet system with Access Protocol HLI

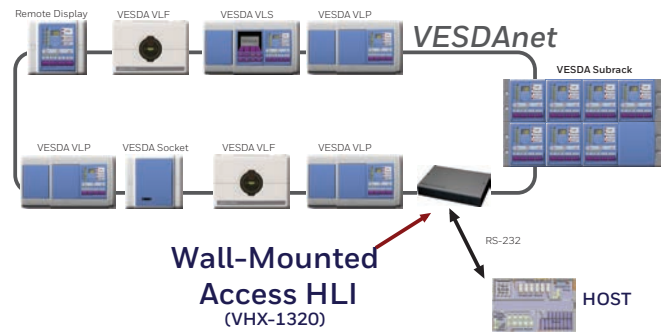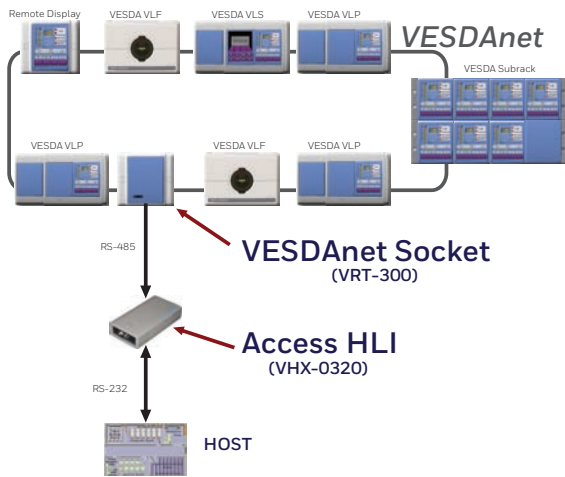

Specifications

Power Consumption	1.68 W (Quiescent)
Supply Voltage	24 VDC
Current Consumption	70 mA (Quiescent)
Dimensions	<p>Standard: 188 mm x 98 mm x 40 mm (7.4 in. x 3.9 in. x 1.6 in. approx.)</p> <p>Wall Mounted: 280 mm x 185 mm x 55 mm (11 in. x 7.3 in. x 2.2 in. approx.)</p>
Weight	<p>Standard: 0.4 kg (0.9 lbs) Wall Mounted: 2 kg (4.4 lbs)</p>
Supplied With	<p>Standard: VESDALink RS-232 9-way serial cable (male-female) VESDAnet RS-485 15-way cable (male-female)</p> <p>Wall Mounted: VESDALink RS-232 9-way serial cable (male-female)</p>
Number of Detectors Supported	Up to 100 detectors

Ordering Information

Ordering Code	Description
VHX-0320	VESDA Access HLI Standard
VHX-1320	VESDA Access HLI Metal Box Wall-mounted
VSP-509	VESDALink RS-232 9-way serial cable (Spare part)
VSP-511	VESDAnet RS-485 15-way cable (Spare part)